DVC

| dvc.video |


CAMERA

DCA-BF5285

5MP HD Analog IR Bullet Camera



- 5MP@20fps/4MP@30fps image, high resolution, true color
- AHD / TVI / CVI/CVBS standard and lossless video output
- Up to 1500 TVL resolution
- CMOS progressive scan, perfectly capture the moving object
- Support OSD menu
- High speed, long distance and real time transmission
- Auto color to B / W at low illumination
- Support ICR switch, true day / night, WDR
- Support noise reduction function
- 30 ~ 50m IR night view distance
- IP67 ingress protection
- Support COC

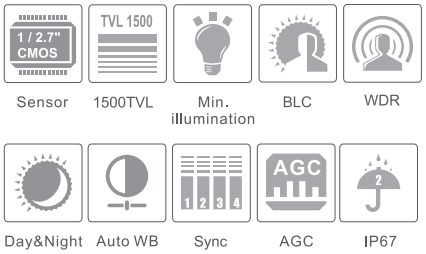

dvc.video
For more information, please visit our website

alarm automatika®

| www.alarmautomatika.com |


DVC DCA-BF5285


5MP HD Analog IR Bullet Camera

SPECIFICATIONS

Model / Specifications	DCA-BF5285	
Camera		
Image Sensor	1 / 2.7 "CMOS	
Resolution	5MP	
Image Size	2560 x 1936	
Video Output	AHD / TVI /CVI/CVBS	
Image System	PAL / NTSC	
Electronic Shutter	Auto	
IR Distance	30 ~ 50 m	
Frame Rate	5MP @20fps	
Min. Illumination	Color : 0.01 lux@F1.2, AGC ON; B/W : 0 lux with IR	
Lens	3.6 mm(2.8 mm/6mm optional)	2.8~12mm
Lens Mount	M12	D14
S / N Ratio	≥52dB (AGC OFF)	
Ingress Protection	IP 67	
Functions		
Function Control	OSD (COC Control)	
Day & Night	ICR	
Digital WDR	Yes	
Digital NR	Yes	
AGC	Yes	
Auto White Balance	Yes	
BLC	Yes	
LSC	Yes	
Defog	No	
HLC	Yes	
Sharpness	Yes	
Mirror	Yes	
Smart IR	Yes	
Image Setting	Yes	
Defect Correction	Yes	
Language	13 languages	
Angle Adjustment	Pan: 0°~360°; Tilt: 0°~90°; Rotation: 0°~360°	
Others		
Power Supply	DC12V (± 10%)	
Power Consumption	IR OFF : < 1W; IR ON : < 6W	
Working Environment	- 30 °C ~ 50 °C, 10 % ~ 90 % (relative humidity)	
Dimensions (mm)	217.7 x 80.5 x 80.5	
Weight (net)	Approx. 0.57KG	

DIMENSIONS

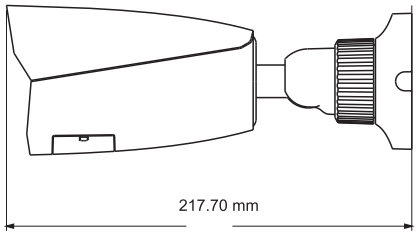



AVAILABLE ACCESSORIES


DAM-35


DAJ-38


DAJ-40

AVAILABLE MODEL

Available Model	DCA-BF5285	Fixed lens
	DCA-BM5125	Motorized zoom lens

*All pictures and specifications are for reference only and are subject to change without prior notice.